


# Specifications

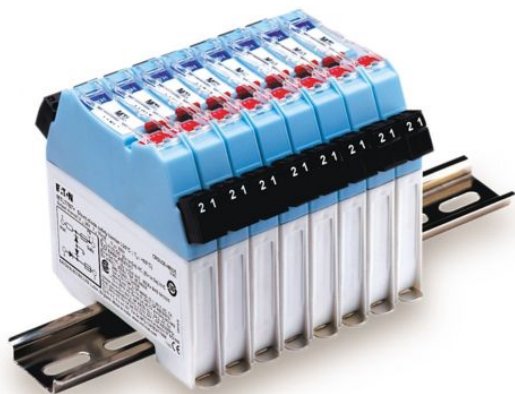

## Eaton MTL7755AC

Eaton Crouse-Hinds series MTL7700 Zener barrier, RTD, grounded, 3 Vdc, 300mA, Polycarbonate, DIN rail mount, For 2- or 3-wire RTDs (floating bridge)

### General specifications

<b>PRODUCT NAME</b>	Eaton Crouse-Hinds series MTL7700 Zener barrier
<b>PRODUCT NAME</b>	Eaton Crouse-Hinds series MTL7700 Zener barrier
<b>CATALOG NUMBER</b>	MTL7755AC
<b>EAN</b>	3066227675731
<b>PRODUCT LENGTH/DEPTH</b>	105 mm
<b>PRODUCT HEIGHT</b>	90 mm
<b>PRODUCT WIDTH</b>	12.6 mm
<b>PRODUCT WEIGHT</b>	140 g
<b>PRODUCT TYPE</b>	Zener barrier



Powering Business Worldwide

## Certifications and compliances

<b>AREA CLASSIFICATION</b>	Hazardous/Classified Locations
<b>STANDARDS TYPE</b>	IECEX/ATEX IEC NEC/CEC
<b>NEC HAZARDOUS RATING</b>	Class I, Division 2 Class I, Zone 2
<b>IECEX/ATEX HAZARDOUS RATING</b>	Zone 0 Zone 2
<b>INGRESS PROTECTION (IP) RATINGS</b>	IP20

## Resources

INSTALLATION INSTRUCTIONS	<a href="#">MTL7700 ATEX Safety Instructions</a>
TECHNICAL SERVICE BULLETINS	<a href="#">MTL7700 Range datasheet</a>

## Product specifications

<b>TYPICAL APPLICATION</b>	RTD, grounded
<b>RATED SUPPLY VOLTAGE DC</b>	3 Vdc
<b>TYPE OF POWER SUPPLY</b>	DC
<b>SWITCHING CURRENT</b>	300mA
<b>MATERIAL</b>	Polycarbonate
<b>MOUNTING METHOD</b>	DIN rail
<b>MINIMUM OPERATING TEMPERATURE</b>	-20 °C
<b>MAXIMUM OPERATING TEMPERATURE</b>	60 °C

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



**Eaton Corporation plc** Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

